


- Y1S Liquid solenoid valve
- M1C Compressor motor 1
- R4T Freeze-up protection
- S1HP High pressure switch
- S4LP Low pressure switch
- R3T Inlet water evap. temp. sensor
- Q1D Discharge temperature controller

- Field piping
- ↔ Check valve
- ← Flare connection
- ⊞ Screw connection
- ⊞ Flange connection
- ✕ Pinched pipe
- Spinned pipe

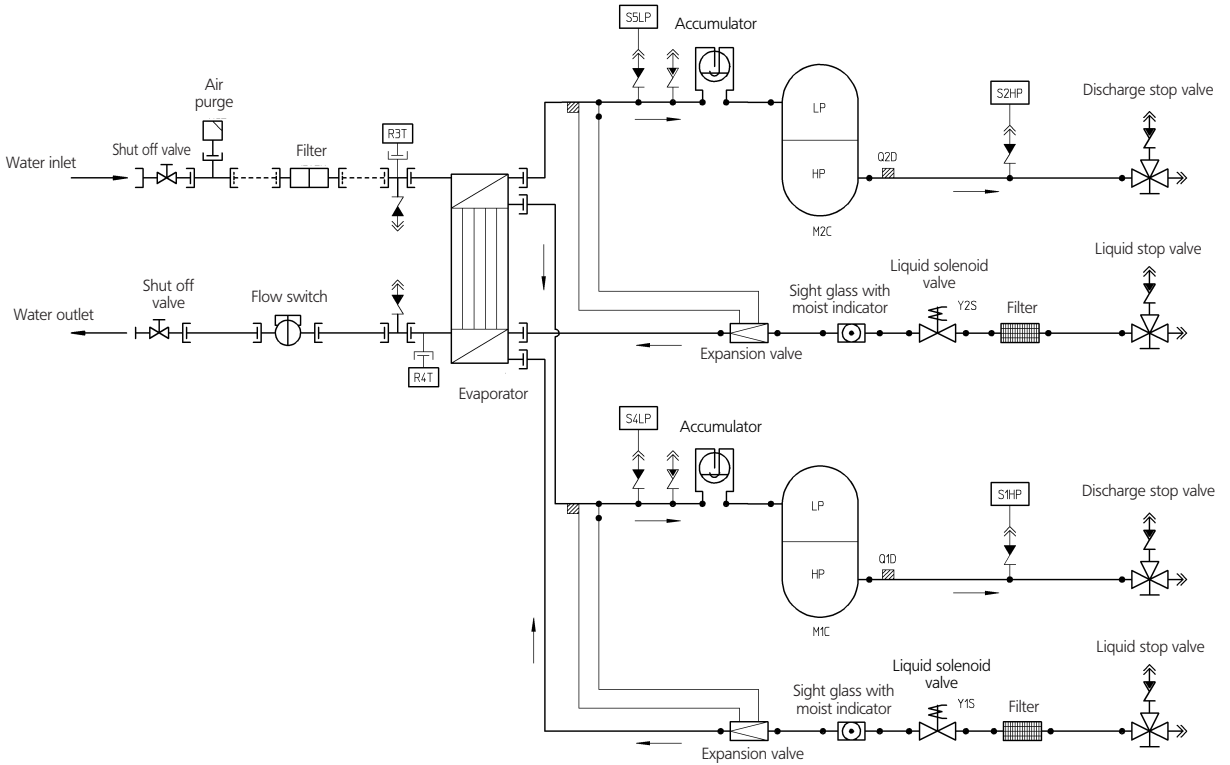

- Y1S Liquid solenoid valve
- Y2S Liquid solenoid valve
- M1C Compressor motor
- M2C Compressor motor
- R4T Freeze-up protection
- R5T Inlet water cond. temp. sensor
- S1HP High pressure switch
- S2HP High pressure switch
- S4LP Low pressure switch
- S5LP Low pressure switch
- R3T Inlet water evap. temp. sensor
- Q1D Discharge temperature controller
- Q2D Discharge temperature controller

- Field piping
- ↔ Check valve
- ↔ Flare connection
- ⊞ Screw connection
- ⊞ Flange connection
- ✕ Pinched pipe
- Spinned pipe