



FTXP20KV

Cooling mode

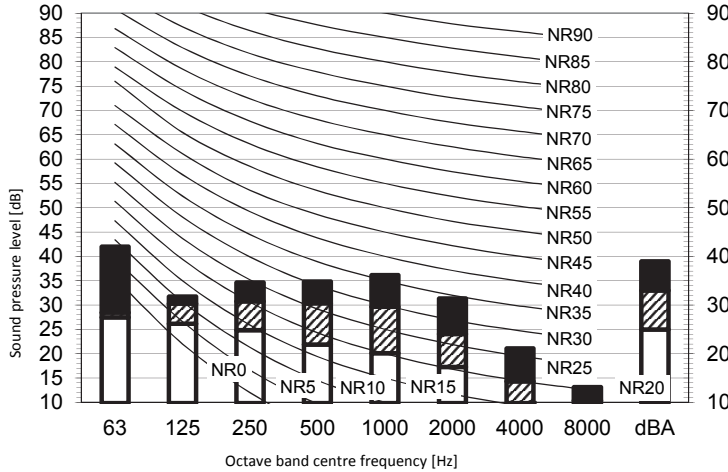

Heating mode

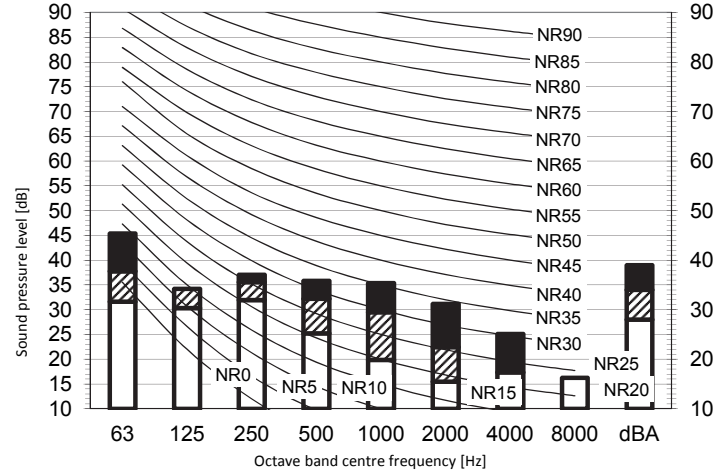


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- C Medium-tap
- D Low-tap

Location of microphone





Cooling		Total dB	
A	B	C	D
dBA	39	33	25

Heating		Total dB	
A	B	C	D
dBA	39	34	28

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

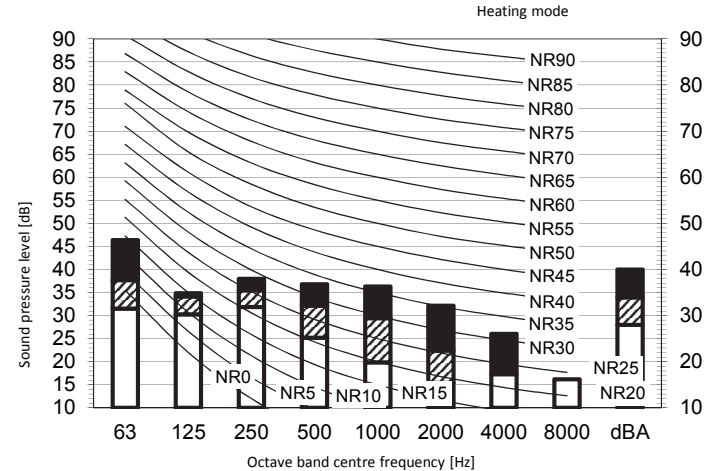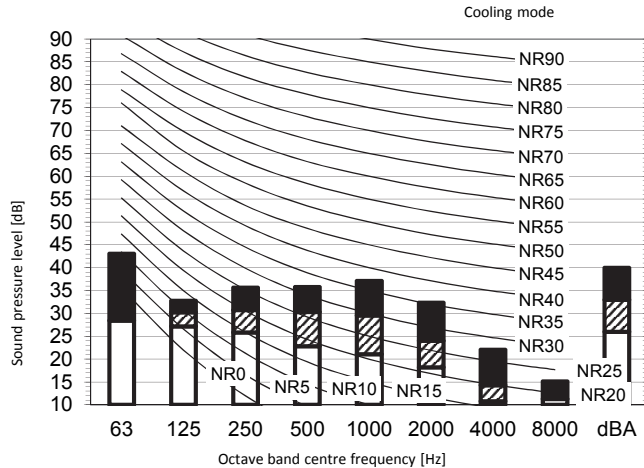


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- C Medium-tap
- D Low-tap

Location of microphone



Cooling

Total dB

	A	B	C	D
dBA	40	33	26	



Heating

Total dB

	A	B	C	D
dBA	40	34	28	

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

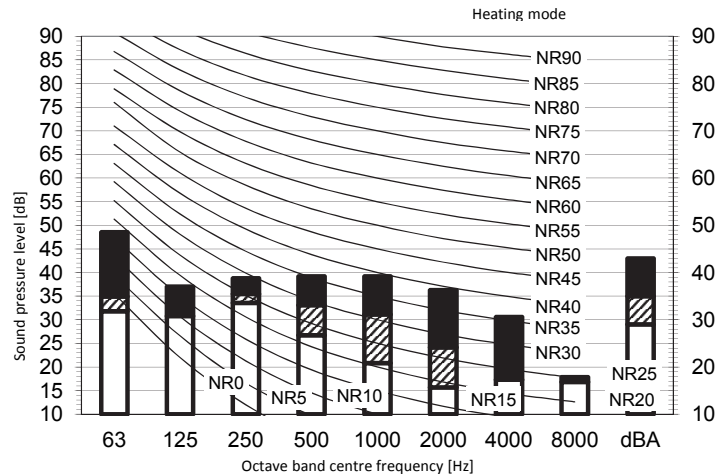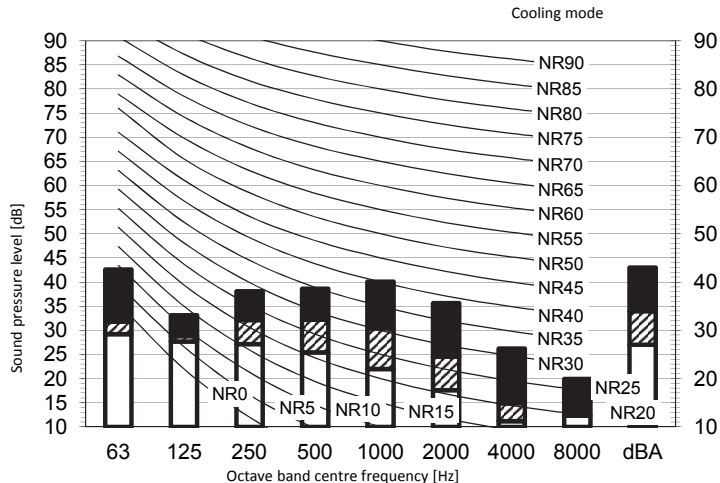


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- C Medium-tap
- D Low-tap

Location of microphone



Cooling	Total dB			
	A	B	C	D
dBA	43	34	34	27

Heating	Total dB			
	A	B	C	D
dBA	43	35	35	29

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber