



NOTES

- 1 Over All (dB):
(B,G,N is already rectified)
- 2 Measuring place: measure in anechoic room.
- 3 Operation noise differs with operation and ambient conditions.
- 4 Operating conditions: Power source 220~240V, 50Hz
- 5 Location of microphone.
JISC9612
The operation noise measuring method is in accordance with JISC9612

| | |
|-------|----------------------|
| Scale | 50Hz 220~240V (H) |
| A | 48 |




Heating

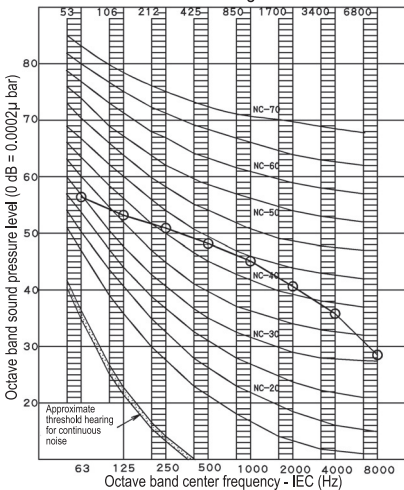

NOTES

- Over All (dB):
(B,G,N is already rectified)
- Measuring place: measure in anechoic room.
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source 220~240V, 50Hz
- Location of microphone.
JISC9612
The operation noise measuring method is in accordance with JISC9612



| | |
|-------|----------------------|
| Scale | 50Hz 220~240V (H) |
| A | 50 |