



4MXS80E

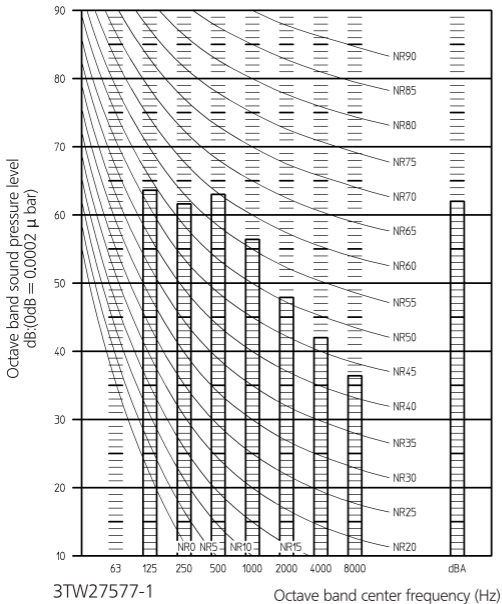

NOTES

- 1 dB(A) = A-weighted sound power level (A-scale according to IEC)
- 2 Reference acoustic intensity 0dB = $10E-6 \mu W/m^2$
- 3 Measured according to ISO 3744

COOLING

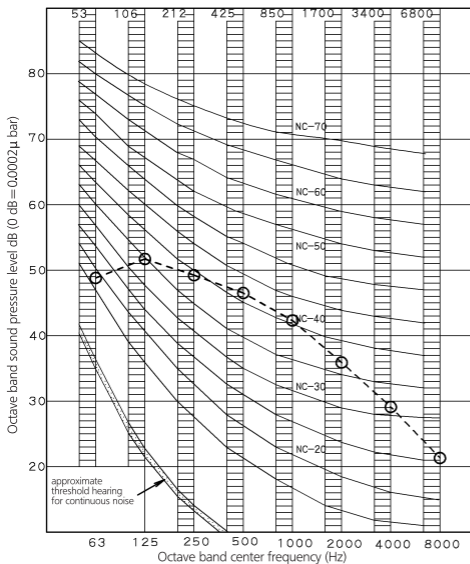

NOTES


- Overall (dB)

Scale	50Hz 230V
A	48

(B,G,N is already rectified)

- Measuring place: Measure in anechoic room
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source 230V 50Hz
- 50Hz 230V Cooling
- Location of microphone
JISC9612
The operation noise measuring method is in accordance with JISC9612

HEATING

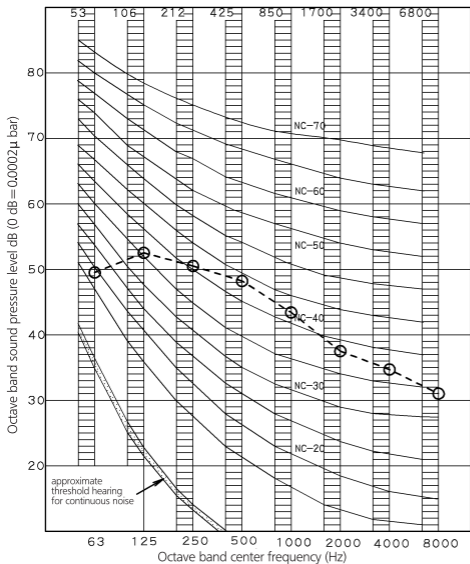

NOTES

- 1 Overall (dB)

Scale	50Hz 230V
A	49

(B,G,N is already rectified)

- 2 Measuring place: Measure in anechoic room
- 3 Operation noise differs with operation and ambient conditions.
- 4 Operating conditions: Power source 230V 50Hz
 ○—○ 50Hz 230V
 Heating
- 5 Location of microphone
 JISC9612
 The operation noise measuring method is in accordance with JISC9612