

Aer condiționat
pentru un
C°nfort Perfect!



Te așteptăm în showroom-ul nostru!



BUENO TECH®

Profesionalism. Experiența. Calitate.

Mobil: 0755 054 411

Fix: 0318 109 504



Fax: 0318 149 799

E-mail: office@buenotech.ro

Site: www.buenotech-shop.ro

Adresa: Str. Heliade Între Vii, nr. 8, Sec. 2, București

FTXB20C

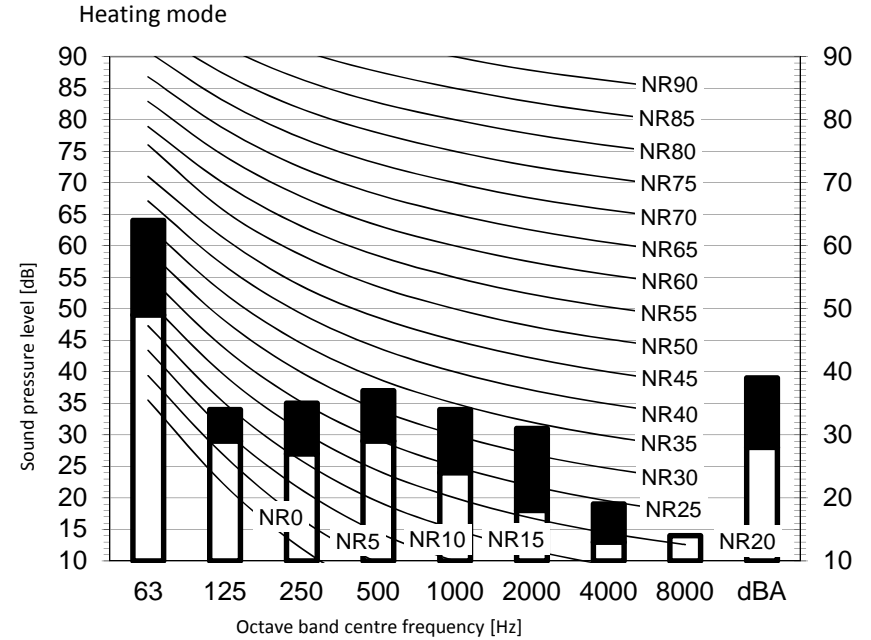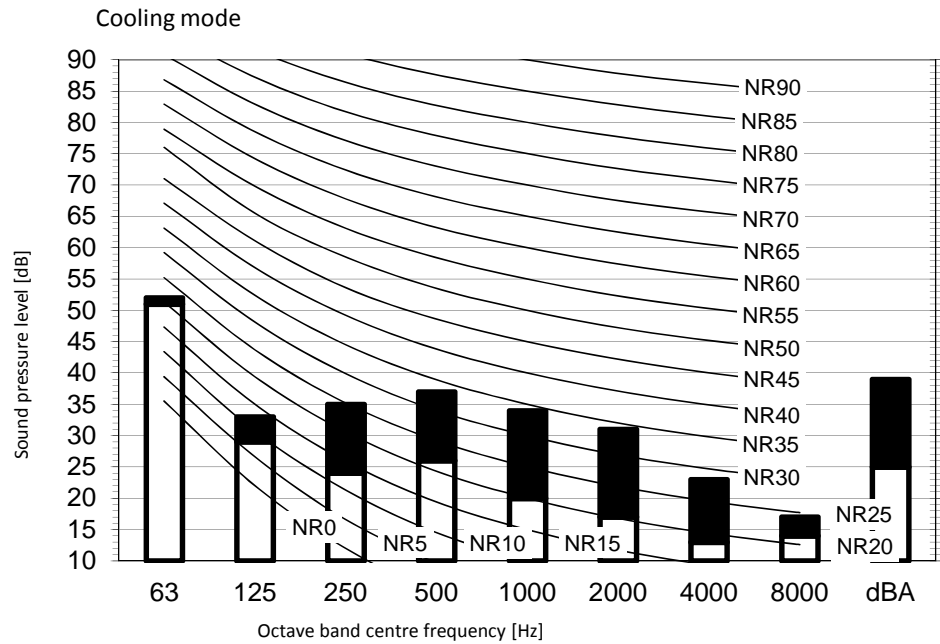

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B High-tap

C Low-tap

Location of microphone



Cooling		Total dB	
A	B	C	
dBA	39	25	


Heating		Total dB	
A	B	B	
dBA	39	28	

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

FTXB25C

Cooling mode

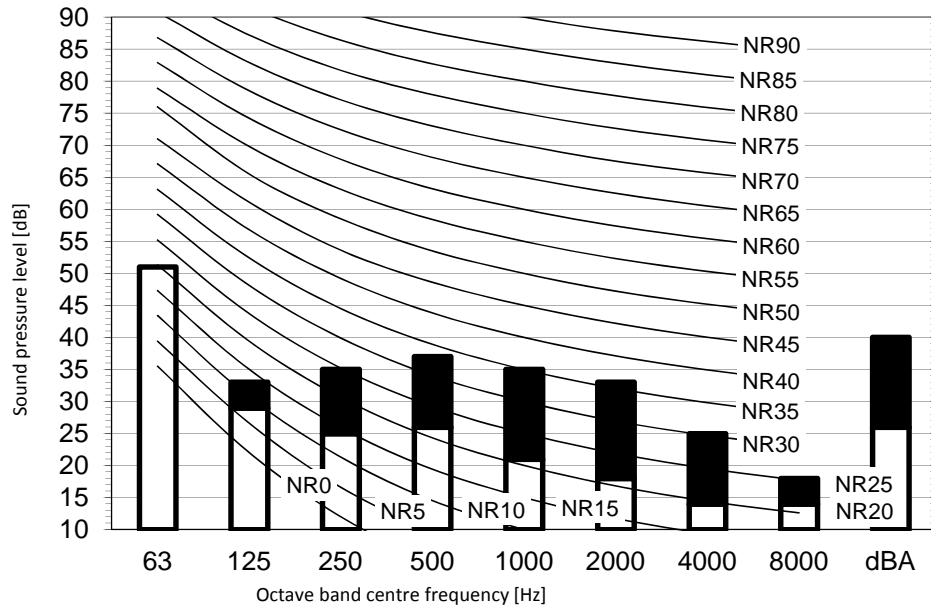

Heating mode

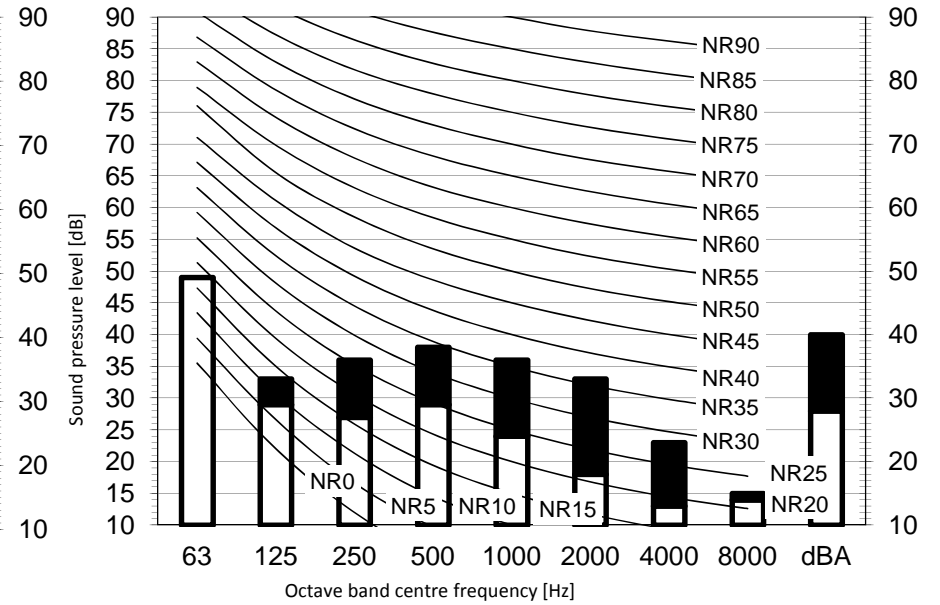

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B High-tap

C Low-tap

Location of microphone



Cooling Total dB

A	B	C
dBA	40	26

Heating Total dB


A	B	B
dBA	40	28

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

FTXB35C

Cooling mode

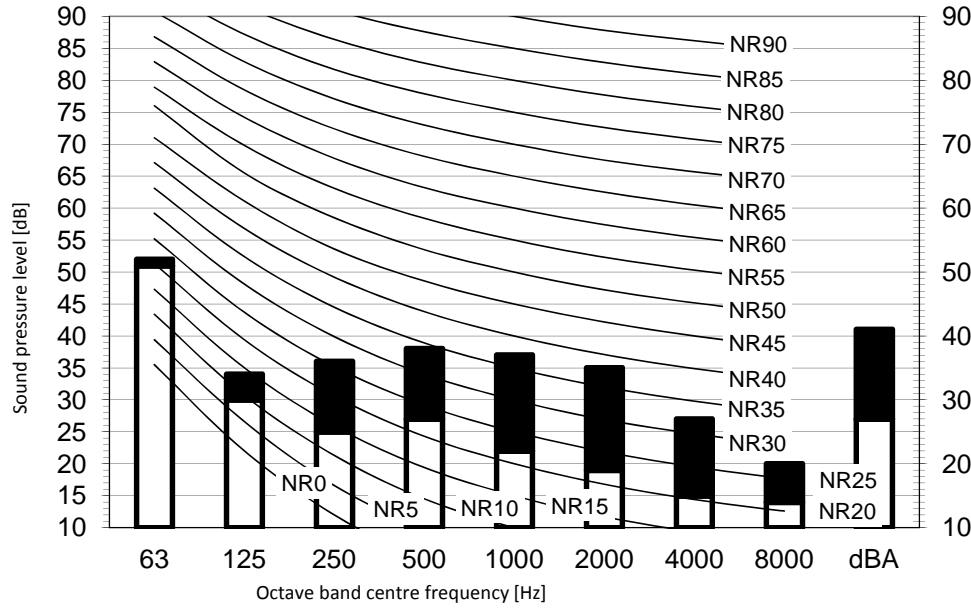

Heating mode

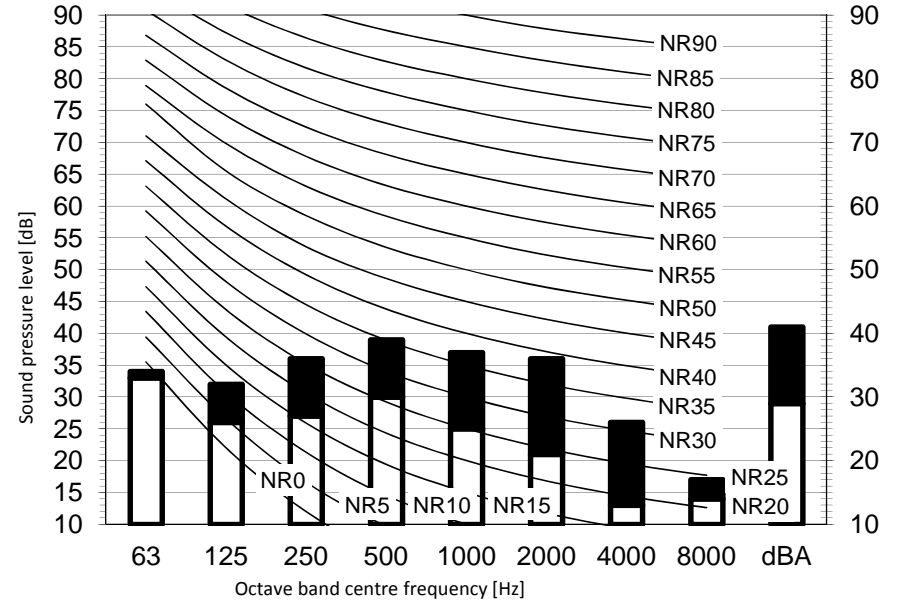


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
 - B High-tap
 - C Low-tap
- Location of microphone

Cooling	Total dB	
A	B	C
dBA	41	27

Heating	Total dB	
A	B	B
dBA	41	29



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

FTXB50-60C

Model	Speed	1/1 Octave A-Weighted Sound Pressure Level (dBA), ref. 20µPa							Overall (dBA)	Noise Criteria
		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz		
FTXB50C	Turbo	39	41	40	40	37	29	16	44	39
	High	35	37	37	36	32	25	12	40	35
	Medium	34	36	36	34	29	22	11	38	33
	Low	30	34	33	31	26	18	10	35	30
	Quiet	28	32	30	28	22	14	10	32	26
FTXB60C	Turbo	42	44	43	42	40	35	20	46	41
	High	39	41	40	38	36	31	16	43	37
	Medium	37	39	38	37	33	28	13	41	36
	Low	33	36	35	33	28	22	11	37	32
	Quiet	28	33	32	28	23	17	9	33	26