


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap
- C Low-tap
- Location of microphone

Cooling	Total dB	
A	B	C
dBA	38	25



Heating	Total dB	
A	B	C
dBA	40	28



Notes



1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

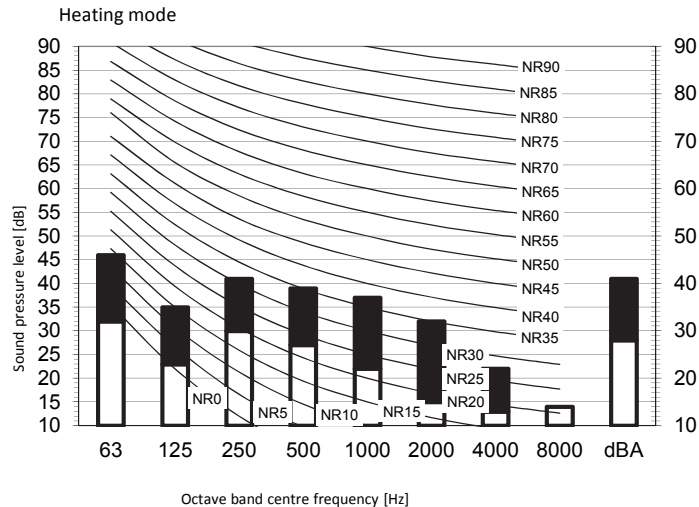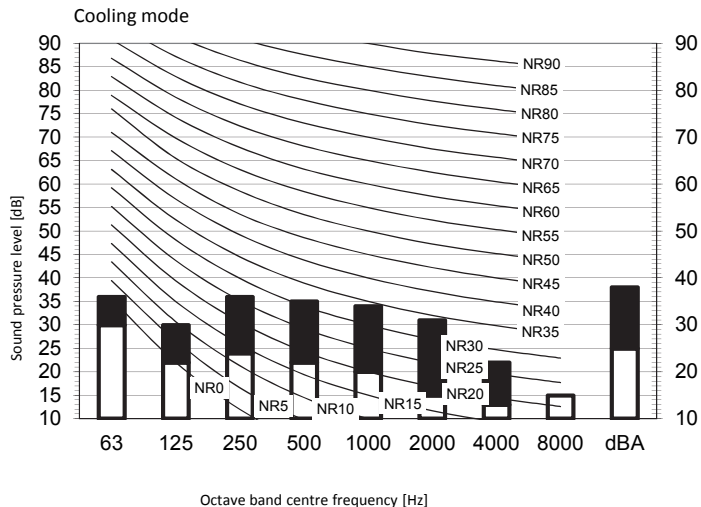FTXJ25MW
FTXJ25MS




Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B  High-tap
- C  Low-tap

Location of microphone




Cooling	Total dB	
A	B	C
dBA	38	25

Heating	Total dB	
A	B	C
dBA	41	28


Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Cooling mode

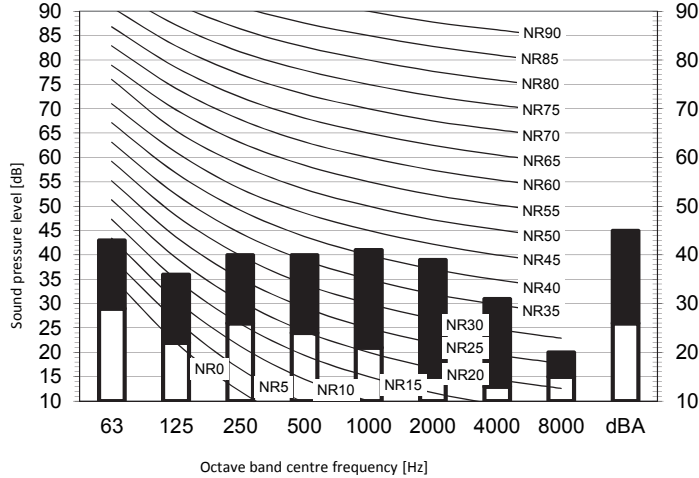

Heating mode

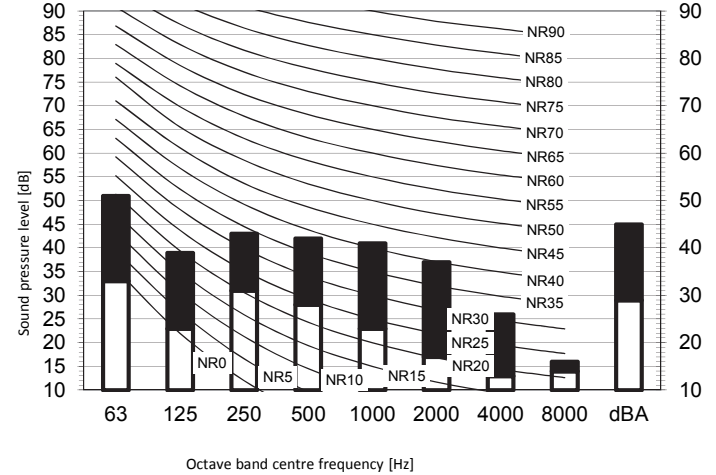


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap
- C Low-tap

Location of microphone



Cooling		Total dB	
A	B	C	
dBA	45	26	


Heating		Total dB	
A	B	C	
dBA	45	29	

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

FTXJ50MW
FTXJ50MS

Cooling mode

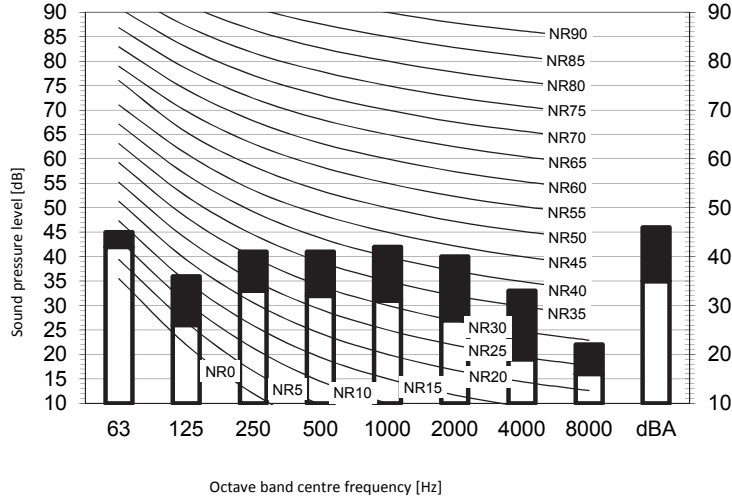

Heating mode

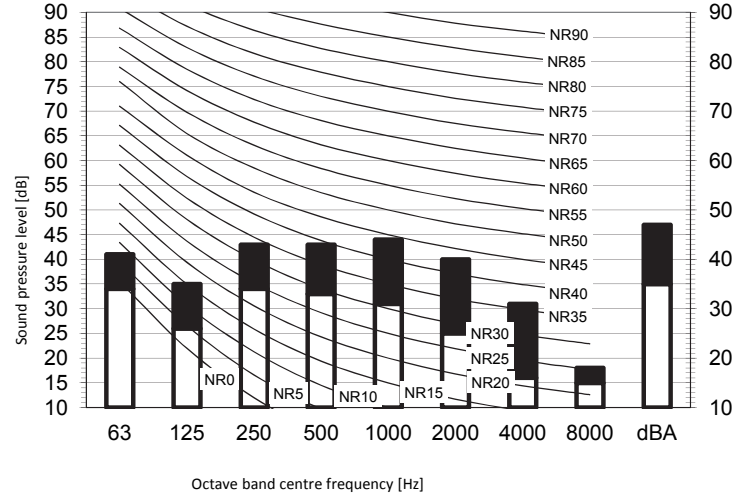


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap
- C Low-tap

Location of microphone



Cooling	Total dB	
A	B	C
dBA	46	35

Heating	Total dB	
A	B	C
dBA	47	35

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber