



Cooling mode

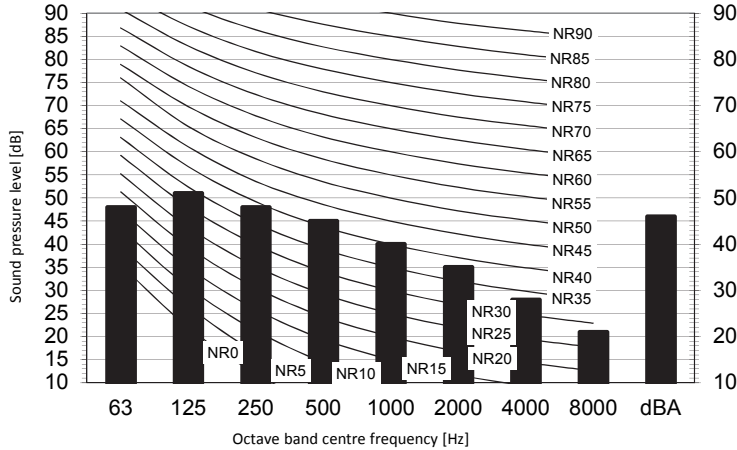


Heating mode

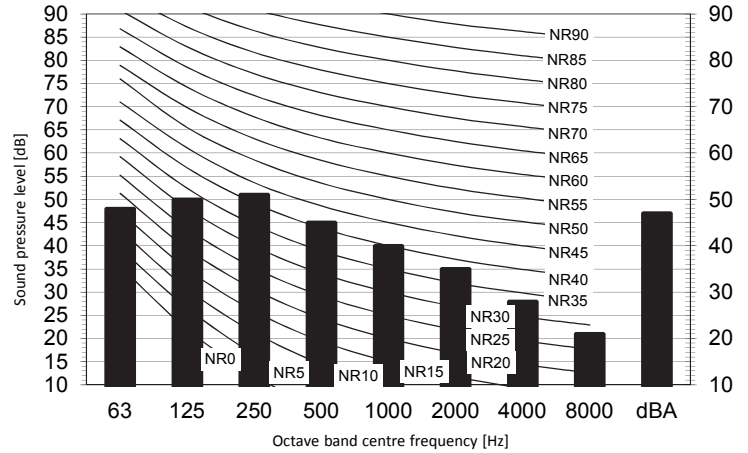

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
 - B High-tap
 - Low-tap
- Location of microphone



Cooling Total dB

A	B
dBA	46


Heating Total dB

A	B
dBA	47


Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

Cooling mode

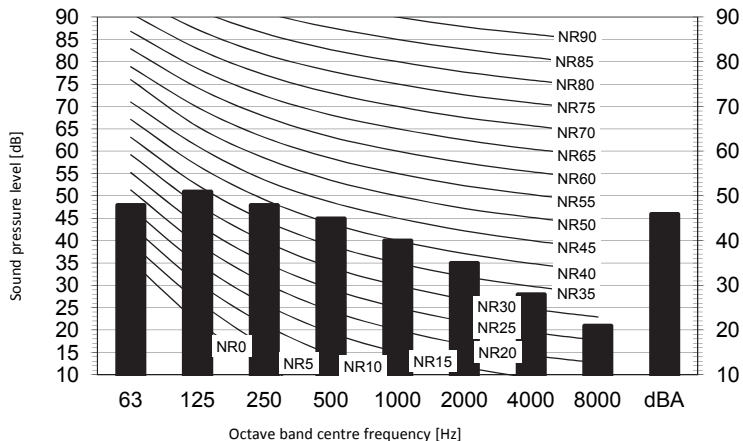

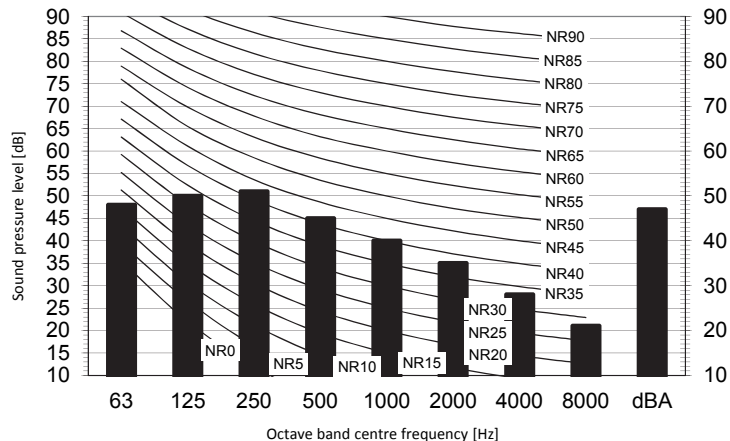

Heating mode




Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
 B  High-tap
 Low-tap

Location of microphone




Cooling		Total dB	
A	B		
dBA	46		

Heating		Total dB	
A	B		
dBA	47		


Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

Cooling mode

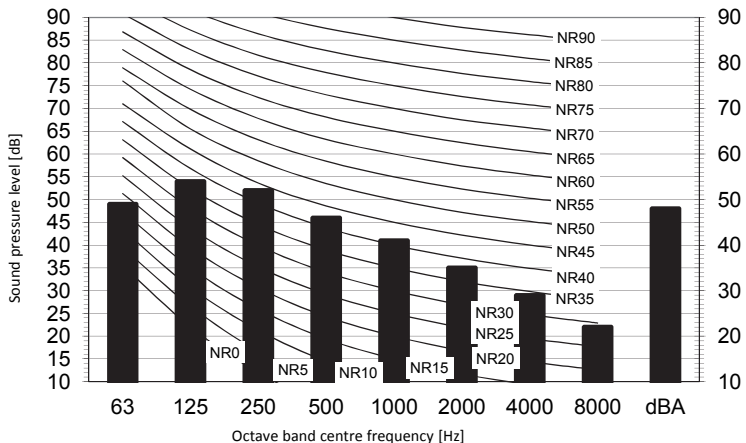

Heating mode

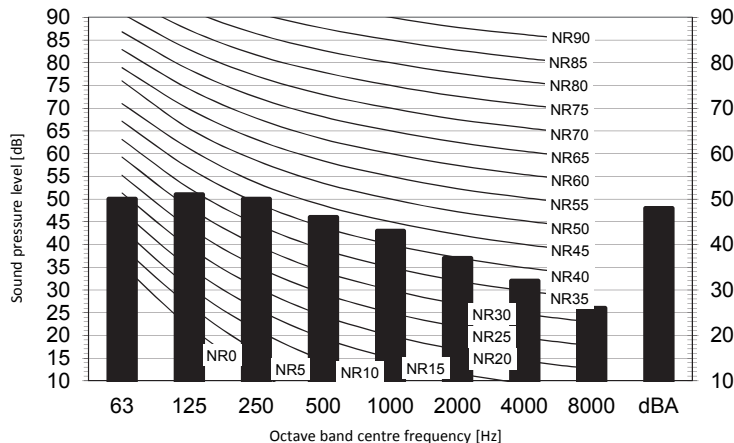


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap
- Low-tap

Location of microphone





Cooling		Total dB	
A	B		
dBA	48		

Heating		Total dB	
A	B		
dBA	48		

Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

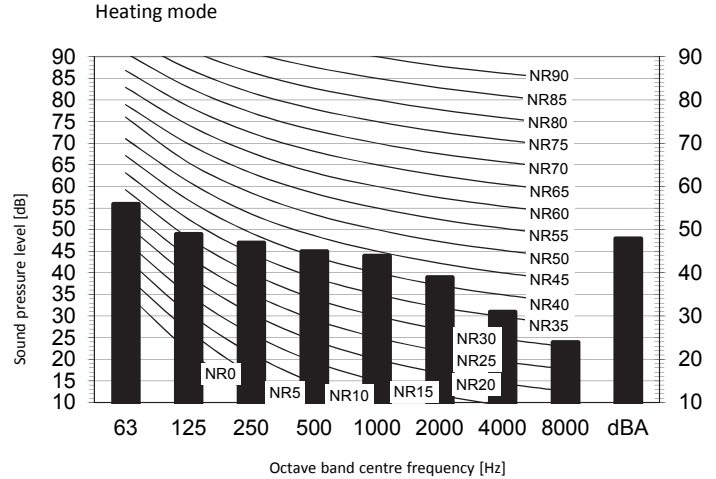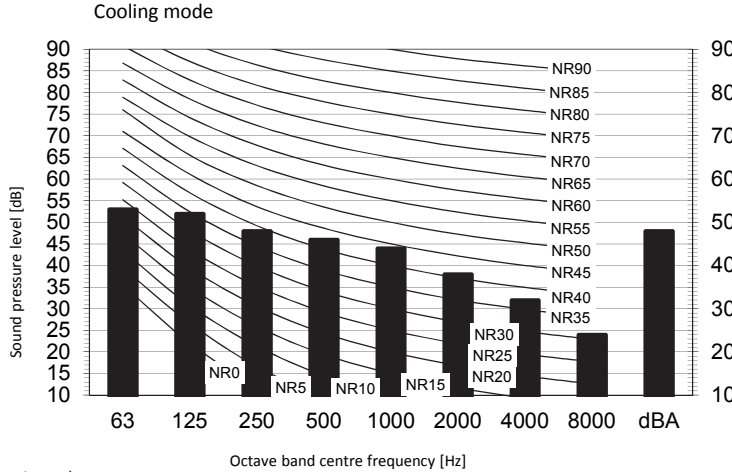


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- Low-tap

Location of microphone



Cooling

Total dB

A	B
dBA	48

Heating

Total dB

A	B
dBA	48

Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber