



RXS20-25L3

Cooling mode

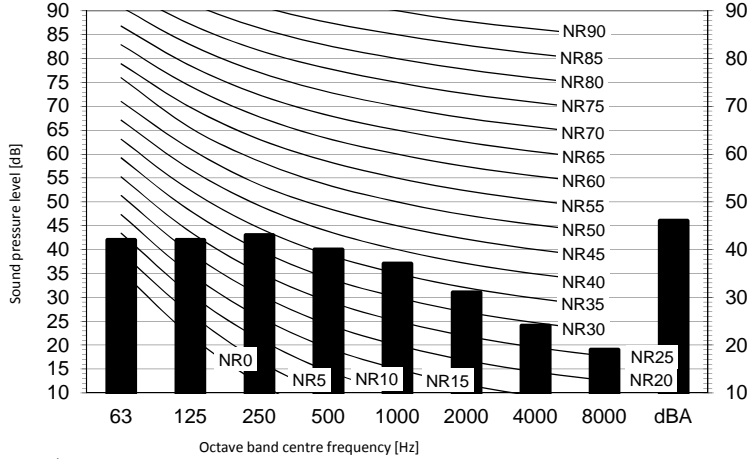



Heating mode

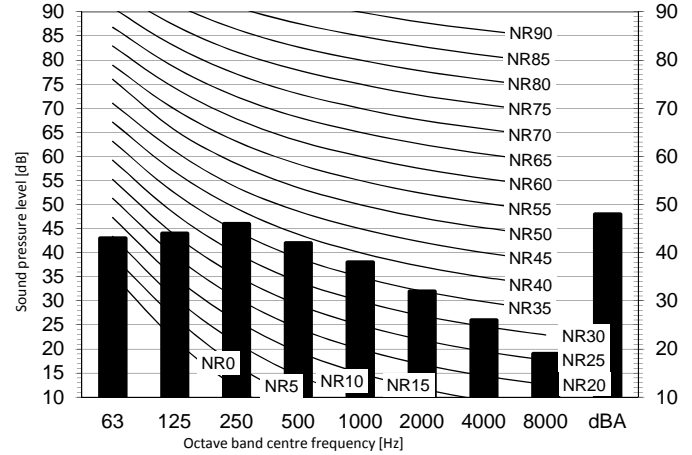


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B
-  High-tap
 -  Low-tap

Location of microphone



Cooling	Total dB
A	B
dBA	46


Heating	Total dB
A	B
dBA	47

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

RXS35L3

Cooling mode

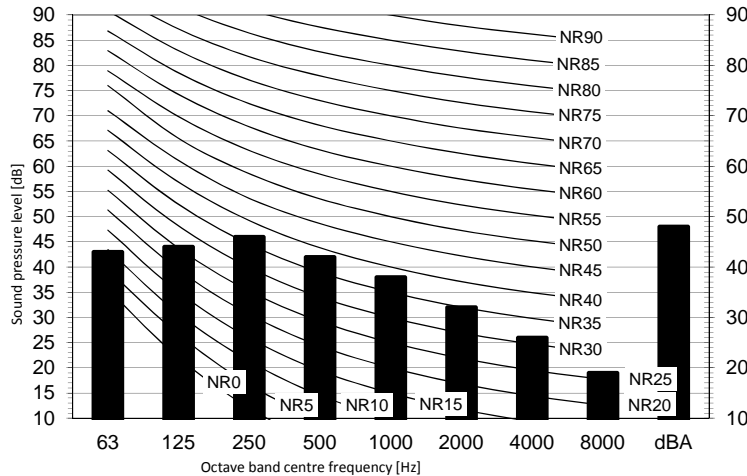

Heating mode

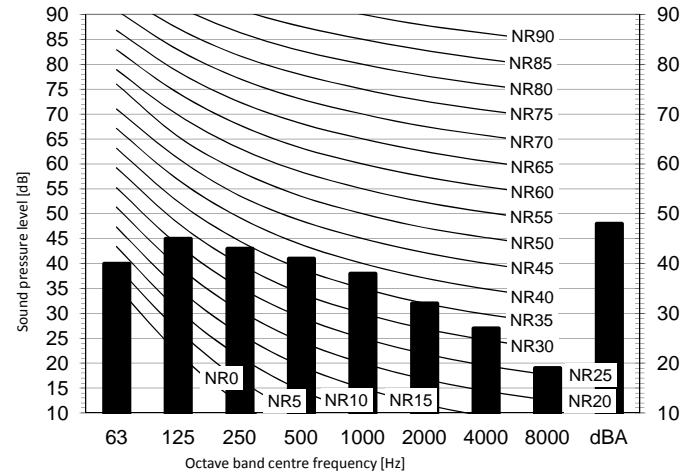


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- Low-tap

Location of microphone



Cooling	Total dB
A	B
dBA	48

Heating	Total dB
A	B
dBA	49

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber