



RX20K

Cooling mode

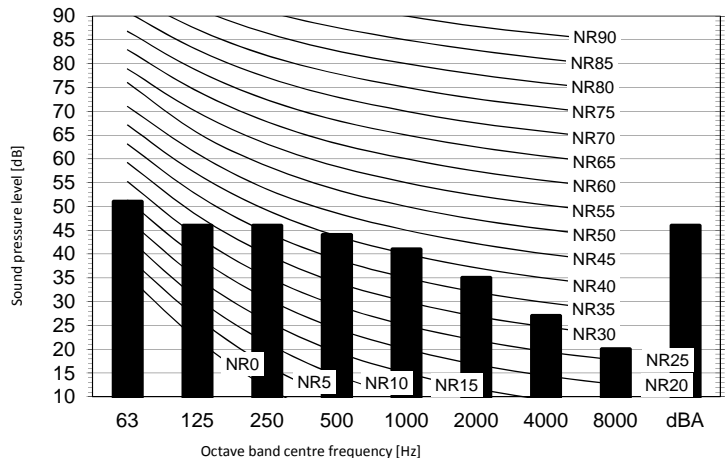

Heating mode

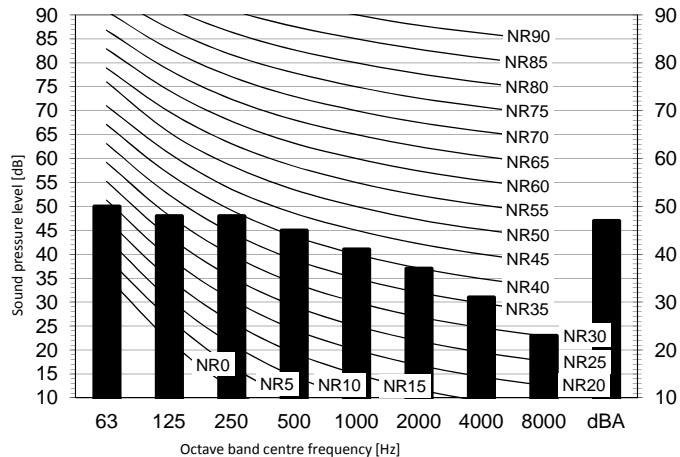


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- Low-tap

Location of microphone



Cooling	Total dB
A	B
dBA	46


Heating	Total dB
A	B
dBA	47

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

RX35K

Cooling mode

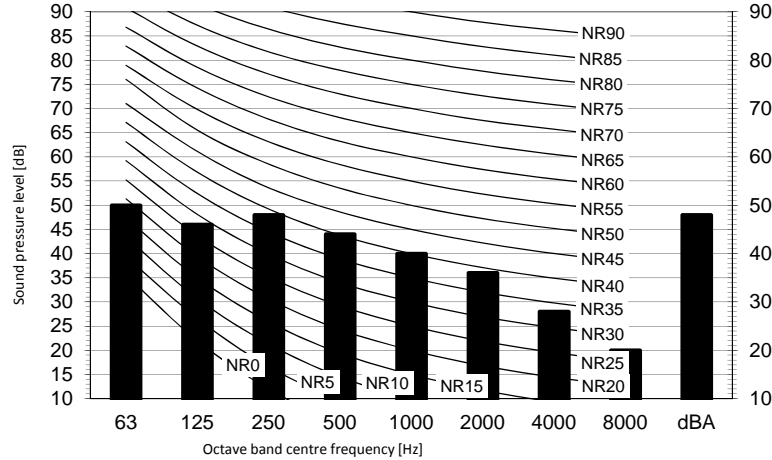

Heating mode

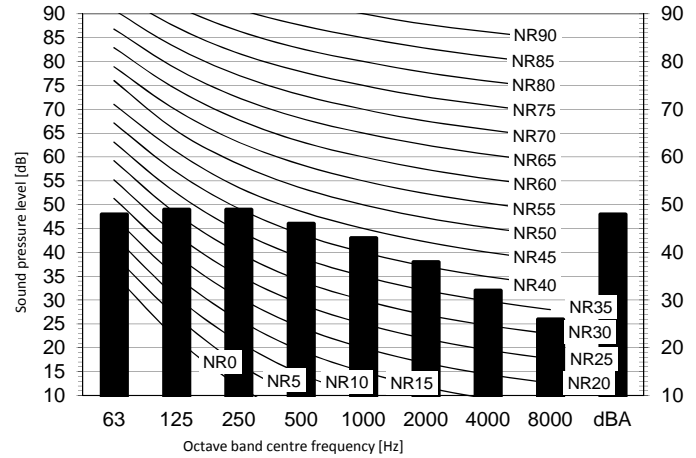

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B  High-tap

 Low-tap

Location of microphone



Cooling Total dB

A	B
dBA	48

Heating Total dB


A	B
dBA	48

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

RX50K

Cooling mode

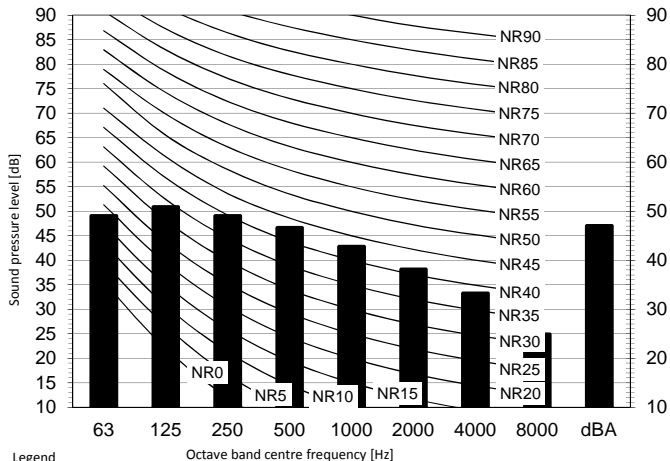

Heating mode

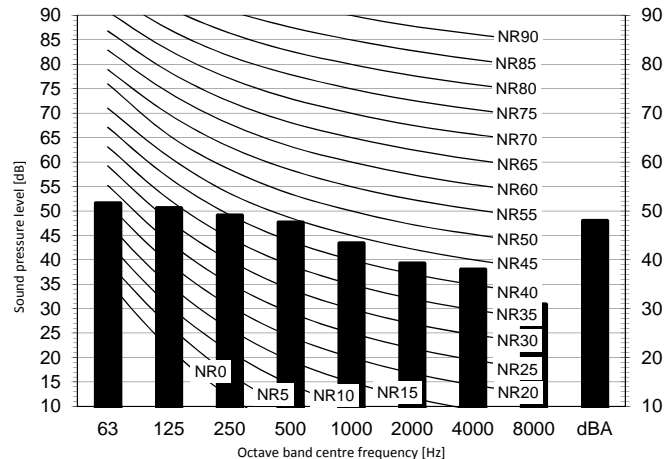

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B  High-tap

 Low-tap

Location of microphone



The operation noise measuring method is in accordance with JISC9612.

Measuring location: anechoic chamber

Cooling Total dB

A	B
dBA	47

Background noise already taken into account.

Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Heating Total dB

A	B
dBA	48

Background noise already taken into account.


Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Notes


- 1 Operating noise varies depending on operation and ambient conditions.

RX60K

Cooling mode

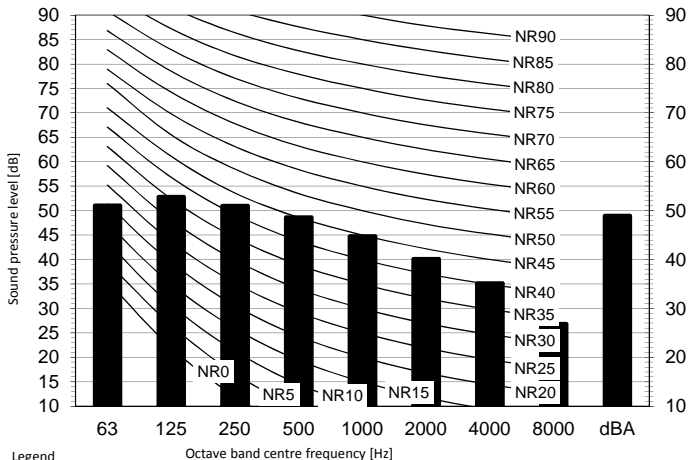

Heating mode

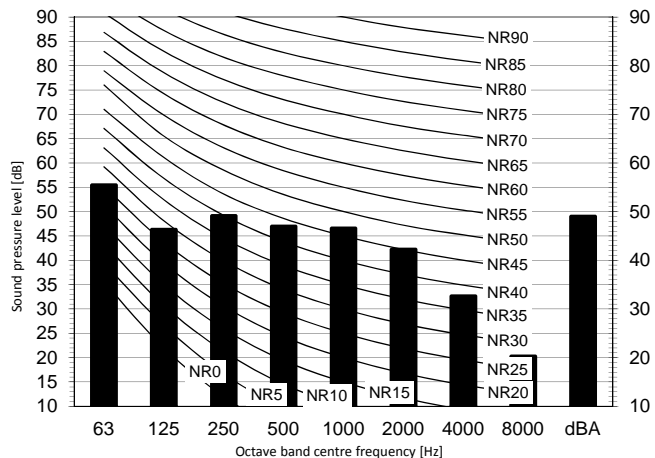

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B High-tap

Low-tap

Location of microphone



The operation noise measuring method is in accordance with JIS C9612.

Measuring location: anechoic chamber

Cooling Total dB

A	B
dBA	49

Background noise already taken into account.

Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Heating Total dB

A	B
dBA	49

Background noise already taken into account.

Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Notes

1. Operating noise varies depending on operation and ambient conditions.