

## NOTES

1 Overall (dB)

Scale	Mode		
	high	middle	low
A	41.0	38.0	35.0
C	44.6	42.1	39.1


(A, C) is already rectified

Power level (dB)

Mode		
high	middle	low
58.0	56.0	51.0

- Measuring place: Anechoic chamber
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source: 220-240V 50Hz
- Cooling: Return air temperature: 27°CDB, 19°CWB  
Outdoor temperature: 35°CDB, 24°CWB
- Heating: Return air temperature: 20°CDB, 15°CWB  
Outdoor temperature: 7°CDB, 6°CWB
- Location of microphone



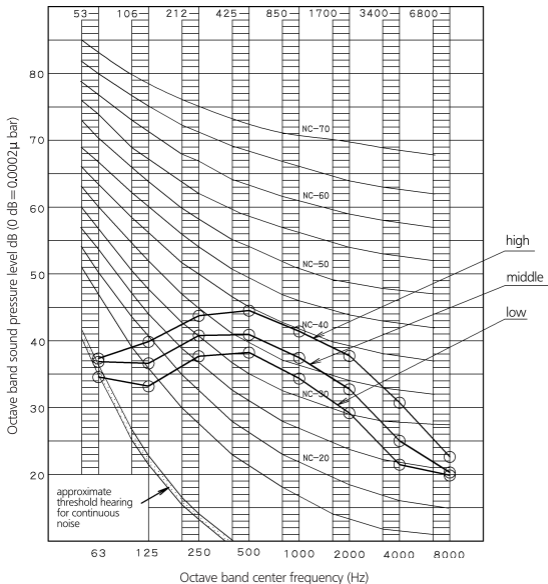

## NOTES

1 Overall (dB)

Scale	Mode		
	high	middle	low
A	46.0	42.0	39.0
C	49.3	46.1	43.1

(B.G.N is already rectified)

Power level (dB)

Mode		
high	middle	low
64.0	60.0	55.0

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 Operating conditions: Power source: 220-240V 50Hz

5 Cooling: Return air temperature: 27°CDB, 19°CWB


Outdoor temperature: 35°CDB, 24°CWB

6 Heating: Return air temperature: 20°CDB, 15°CWB

Outdoor temperature: 7°CDB, 6°CWB

7 Location of microphone



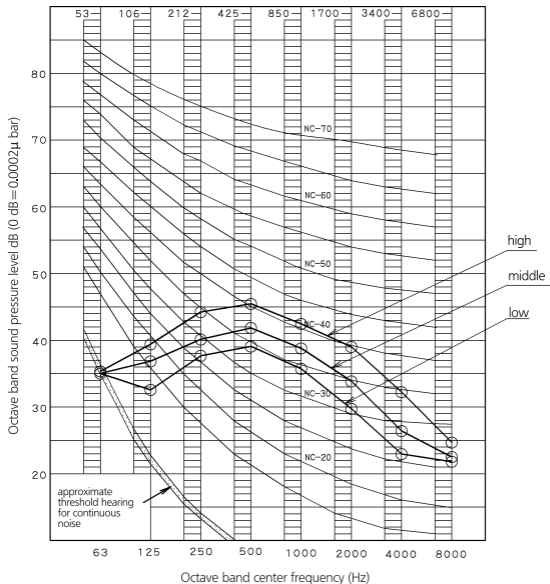

## NOTES

1 Overall (dB)

Scale	Mode		
	high	middle	low
A	47.0	43.0	40.0
C	50.0	46.4	43.6

(A, C, N is already rectified)

Power level (dB)

Mode		
high	middle	low
65.0	61.0	56.0

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 Operating conditions: Power source: 220-240V 50Hz

5 Cooling: Return air temperature: 27°CDB, 19°CWB

Outdoor temperature: 35°CDB, 24°CWB

6 Heating: Return air temperature: 20°CDB, 15°CWB

Outdoor temperature: 7°CDB, 6°CWB

7 Location of microphone

