


FAQ71C9

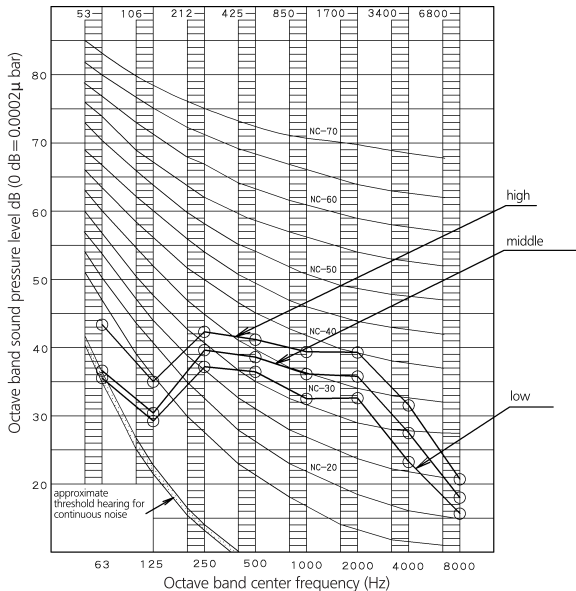

NOTES

1 Overall (dB)

Scale	230V		
	high	middle	low
A	45	42	40
C	48	45	43

Power level (dB)

230V		
high	middle	low
61	58	56

(B,G,N is already rectified)


- Measuring place: Anechoic chamber
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source: 230V 50Hz
- Cooling: Return air temperature: 27°C DB, 19°C WB
Outdoor temperature: 35°C DB, 24°C WB
- Heating: Return air temperature: 20°C DB, 15°C WB
Outdoor temperature: 7°C DB, 6°C WB

○—○ 230V

7 Location of microphone



FAQ100C9

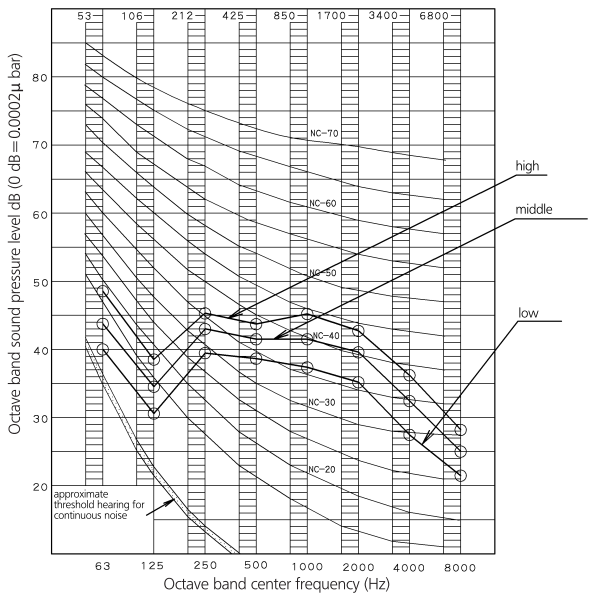

NOTES

1 Overall (dB)

Scale	230V		
	high	middle	low
A	49	45	41
C	52.5	48	44.5

Power level (dB)

230V		
high	middle	low
65	62	58

(R.G.N is already rectified)

- Measuring place: Anechoic chamber
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source: 230V 50Hz
- Cooling: Return air temperature: 27°C DB, 19°C WB
Outdoor temperature: 35°C DB, 24°C WB
- Heating: Return air temperature: 20°C DB, 15°C WB
Outdoor temperature: 7°C DB, 6°C WB
- 230V
- Location of microphone

