

## NOTES

### 1 Overall (dB)

Scale	230V		
	high	middle	low
A	43	41	38
C	48	46	43

(B.G.N is already rectified)

### Power level (dB)

230V		
high	middle	low
55	53	50

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 Operating conditions: Power source: 230V 50Hz

5 Cooling: Return air temperature: 27°C DB, 19°C WB

Outdoor temperature: 35°C DB, 24°C WB

6 Heating: Return air temperature: 20°C DB, 15°C WB


Outdoor temperature: 7°C DB, 6°C WB

○—○ 230V

7 Location of microphone



# FVQ100C

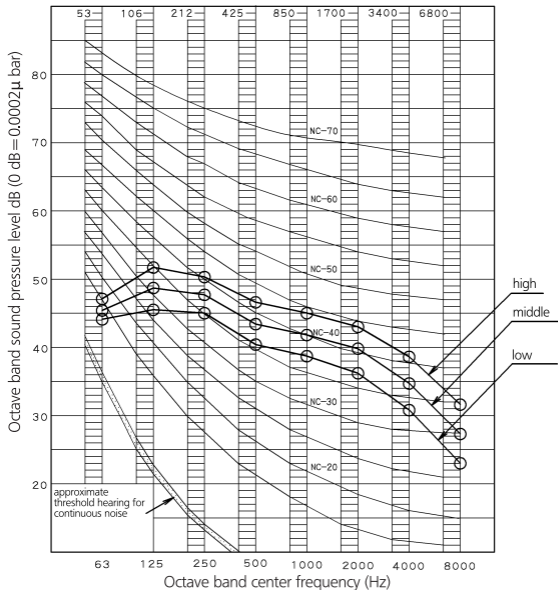

## NOTES

### 1 Overall (dB)

Scale	230V		
	high	middle	low
A	50	47	44
C	55	52	50

(R.G.N is already rectified)

### Power level (dB)

230V		
high	middle	low
62	59	56

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 Operating conditions: Power source: 230V 50Hz

5 Cooling: Return air temperature: 27°C DB, 19°C WB

Outdoor temperature: 35°C DB, 24°C WB


6 Heating: Return air temperature: 20°C DB, 15°C WB

Outdoor temperature: 7°C DB, 6°C WB

○—○ 230V

7 Location of microphone

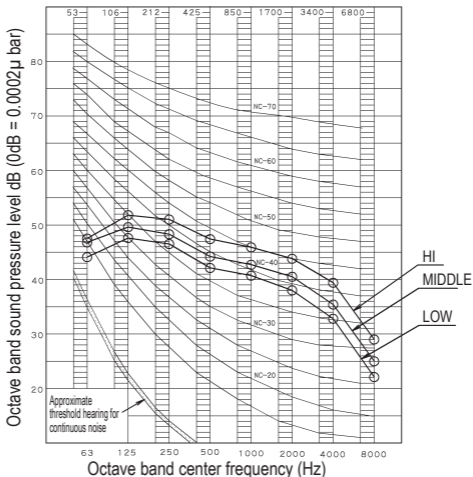


**4D073853A**

## NOTES

### Overall (dB)

Scale	230V		
	HI	MIDDLE	LOW
A	51	48	46
C	56	53	52

(B, G, N is already rectified)

### Power level (dB)

230V		
HI	MIDDLE	LOW
63	60	58

### Measuring place

Anechoic chamber

Operation noise differs with operation and ambient conditions.

### Operating conditions

Power source 230V 50Hz

Cooling Return air temperature: 27 °C DB, 19 °C WB


Outdoor temperature: 35 °C DB, 24 °C WB

Heating Return air temperature: 20 °C DB, 15 °C WB


Outdoor temperature: 7 °C DB, 6 °C WB

○ — ○ 230V

### Location of microphone



# FVQ140C

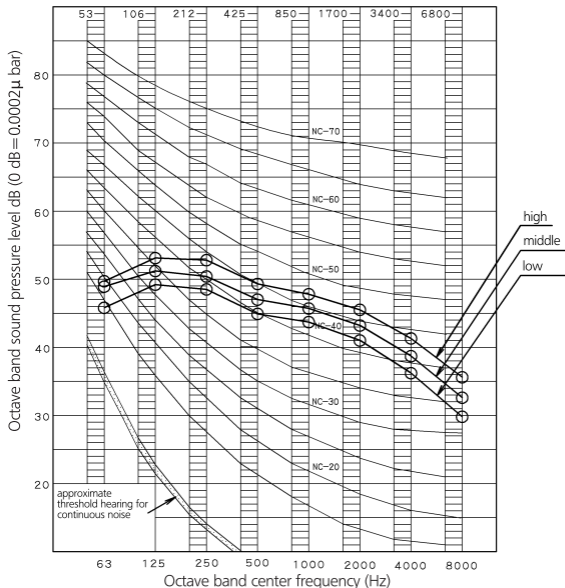

## NOTES

### 1 Overall (dB)

Scale	230V		
	high	middle	low
A	53	51	48
C	58	56	54

(B,G,N is already rectified)

### Power level (dB)

230V		
high	middle	low
65	63	60

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 Operating conditions: Power source: 230V 50Hz

5 Cooling: Return air temperature: 27°C DB, 19°C WB

Outdoor temperature: 35°C DB, 24°C WB

6 Heating: Return air temperature: 20°C DB, 15°C WB

Outdoor temperature: 7°C DB, 6°C WB

○—○ 230V

7 Location of microphone

